

SKM 50GB063D



SEMITRANS® 2

Superfast NPT-IGBT Modules


SKM 50GB063D

Features

- NPT = non punch-through IGBT technology
- High short circuit capability, self limiting to $6 \times I_C$
- Pos. temp.-coeff. of V_{CEsat}
- Isolated copper baseplate

Typical Applications

- Switched mode power supplies
- UPS
- Three phase inverters for servo / AC motor speed control

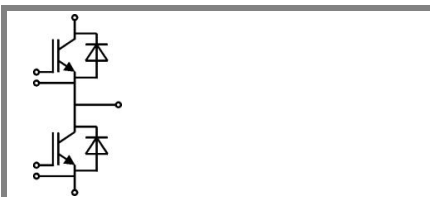

GB

Absolute Maximum Ratings		$T_c = 25^\circ\text{C}$, unless otherwise specified		
Symbol	Conditions	Values	Units	
IGBT				
V_{CES}	$T_j = 25^\circ\text{C}$	600	V	
I_C	$T_j = 150^\circ\text{C}$	$T_{case} = 25^\circ\text{C}$	70	A
		$T_{case} = 75^\circ\text{C}$	50	A
I_{CRM}	$I_{CRM} = 2 \times I_{Cnom}$	100	A	
V_{GES}		± 20	V	
t_{psc}	$V_{CC} = 300\text{ V}; V_{GE} \leq 20\text{ V}; T_j = 125^\circ\text{C}$ $V_{CES} < 600\text{ V}$	10	μs	
Inverse Diode				
I_F	$T_j = 150^\circ\text{C}$	$T_{case} = 25^\circ\text{C}$	75	A
		$T_{case} = 80^\circ\text{C}$	50	A
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$	100	A	
I_{FSM}	$t_p = 10\text{ ms}; \text{sin.}$	$T_j = 150^\circ\text{C}$	440	A
Module				
$I_{t(RMS)}$		200	A	
T_{vj}		- 40 ... + 150	$^\circ\text{C}$	
T_{stg}		- 40 ... + 125	$^\circ\text{C}$	
V_{isol}	AC, 1 min.	2500	V	

Characteristics		$T_c = 25^\circ\text{C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT					
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 1\text{ mA}$	4,5	5,5	6,5	V
I_{CES}	$V_{GE} = 0\text{ V}, V_{CE} = V_{CES}$	$T_j = 25^\circ\text{C}$	0,1	0,3	mA
			$T_j = 125^\circ\text{C}$	1	
V_{CE0}					V
r_{CE}	$V_{GE} = 15\text{ V}$	$T_j = 25^\circ\text{C}$	25		$\text{m}\Omega$
		$T_j = 125^\circ\text{C}$	33		$\text{m}\Omega$
$V_{CE(sat)}$	$I_{Cnom} = 50\text{ A}, V_{GE} = 15\text{ V}$	$T_j = 25^\circ\text{C}_{chiplev.}$	2,1	2,5	V
		$T_j = 125^\circ\text{C}_{chiplev.}$	2,4	2,8	V
C_{res}	$V_{CE} = 25, V_{GE} = 0\text{ V}$	$f = 1\text{ MHz}$	2,8		nF
C_{oes}			0,3		nF
C_{res}			0,2		nF
Q_G	$V_{GE} = 0\text{V}...+15\text{V}$		120		nC
R_{Gint}	$T_j = ^\circ\text{C}$		0		Ω
$t_{d(on)}$	$R_{Gon} = 22\ \Omega$	$V_{CC} = 300\text{V}$ $I_{Cnom} = 50\text{A}$	50		ns
t_r			40		ns
E_{on}			2,5		mJ
$t_{d(off)}$	$R_{Goff} = 22\ \Omega$	$T_j = 125^\circ\text{C}$ $V_{GE} = \pm 15\text{V}$	300		ns
t_f			30		ns
E_{off}			1,8		mJ
$R_{th(j-c)}$	per IGBT			0,5	K/W



SEMITRANS® 2

Superfast NPT-IGBT Modules


SKM 50GB063D

Features

- NPT = non punch-through IGBT technology
- High short circuit capability, self limiting to $6 \times I_C$
- Pos. temp.-coeff. of V_{CEsat}
- Isolated copper baseplate

Typical Applications

- Switched mode power supplies
- UPS
- Three phase inverters for servo / AC motor speed control

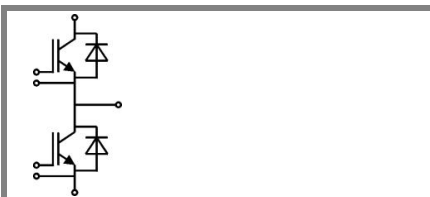

GB

Characteristics

Symbol	Conditions	min.	typ.	max.	Units
Inverse Diode					
$V_F = V_{EC}$	$I_{Fnom} = 50 \text{ A}; V_{GE} = 0 \text{ V}$		1,45	1,7	V
			1,35		V
V_{F0}				0,9	V
r_F			10	15	mΩ
I_{RRM}	$I_{Fnom} = 50 \text{ A}$		31		A
Q_{rr}	$di/dt = 50 \text{ A}/\mu\text{s}$		3,2		μC
E_{off}	$V_{GE} = -15 \text{ V}; V_{CC} = 300 \text{ V}$				mJ
$R_{th(j-c)D}$	per diode			1	K/W
Module					
L_{CE}				30	nH
R_{CC+EE}	res., terminal-chip	$T_{case} = 25 \text{ °C}$	0,75		mΩ
		$T_{case} = 125 \text{ °C}$	1		mΩ
$R_{th(c-s)}$	per module			0,05	K/W
M_s	to heat sink M6		3	5	Nm
M_t	to terminals M5		2,5	5	Nm
w				160	g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

SKM 50GB063D



SEMITRANS[®] 2

Superfast NPT-IGBT Modules


SKM 50GB063D

Features

- NPT = non punch-through IGBT technology
- High short circuit capability, self limiting to $6 \times I_C$
- Pos. temp.-coeff. of V_{CEsat}
- Isolated copper baseplate







Typical Applications







- Switched mode power supplies
- UPS
- Three phase inverters for servo / AC motor speed control

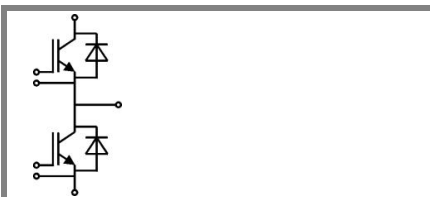

GB

Z_{th}		Conditions	Values	Units
$Z_{th(j-c)I}$				
$R_{\theta j-c1}$	$i = 1$		290	mk/W
$R_{\theta j-c2}$	$i = 2$		145	mk/W
$R_{\theta j-c3}$	$i = 3$		54	mk/W
$R_{\theta j-c4}$	$i = 4$		11	mk/W
τ_{th1}	$i = 1$		0,0382	s
τ_{th2}	$i = 2$		0,0078	s
τ_{th3}	$i = 3$		0,0017	s
τ_{th4}	$i = 4$		0,0001	s
$Z_{th(j-c)D}$				
$R_{\theta j-cD1}$	$i = 1$		550	mk/W
$R_{\theta j-cD2}$	$i = 2$		340	mk/W
$R_{\theta j-cD3}$	$i = 3$		92	mk/W
$R_{\theta j-cD4}$	$i = 4$		18	mk/W
τ_{thD1}	$i = 1$		0,0761	s
τ_{thD2}	$i = 2$		0,045	s
τ_{thD3}	$i = 3$		0,011	s
τ_{thD4}	$i = 4$		0,0002	s
$Z_{th(r-s)}$				
$R_{\theta r-s1}$	$i = 1$			mk/W
$R_{\theta r-s2}$	$i = 2$			mk/W
$R_{\theta r-s3}$	$i = 3$			mk/W
$R_{\theta r-s4}$	$i = 4$			mk/W
τ_{thr-s1}	$i = 1$			s
τ_{thr-s2}	$i = 2$			s
τ_{thr-s3}	$i = 3$			s
τ_{thr-s4}	$i = 4$			s

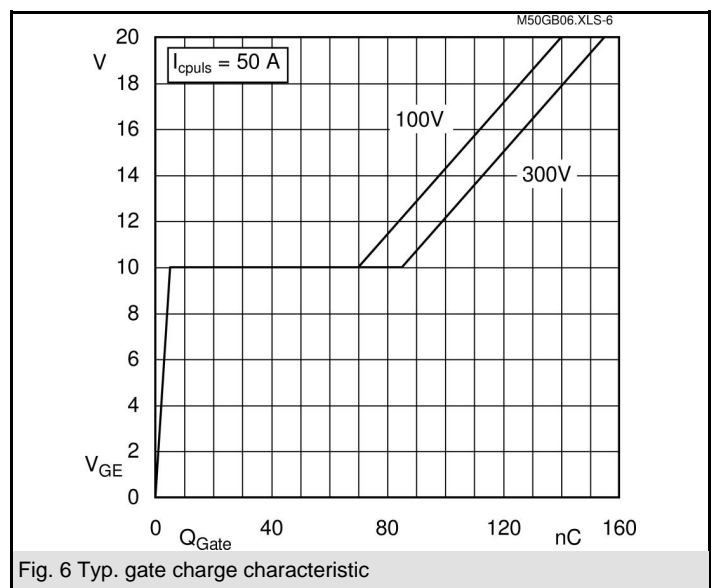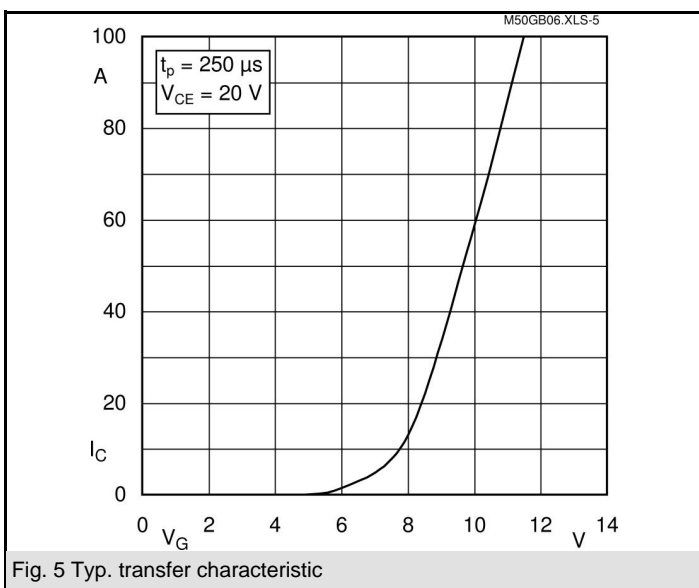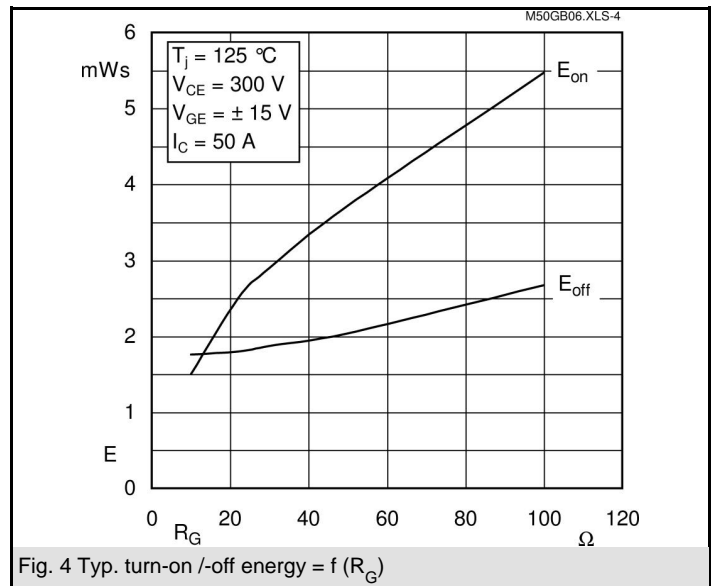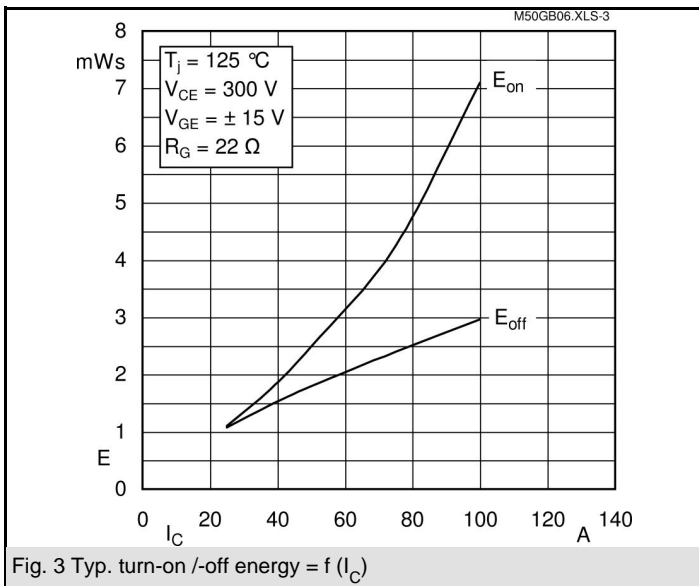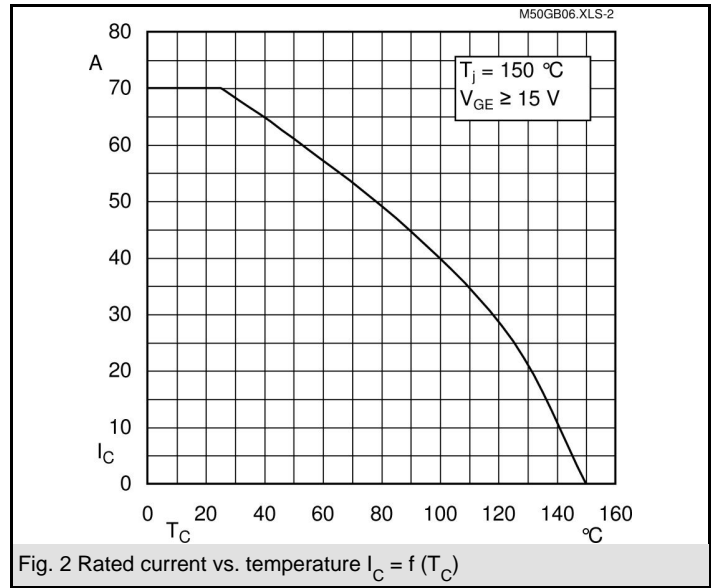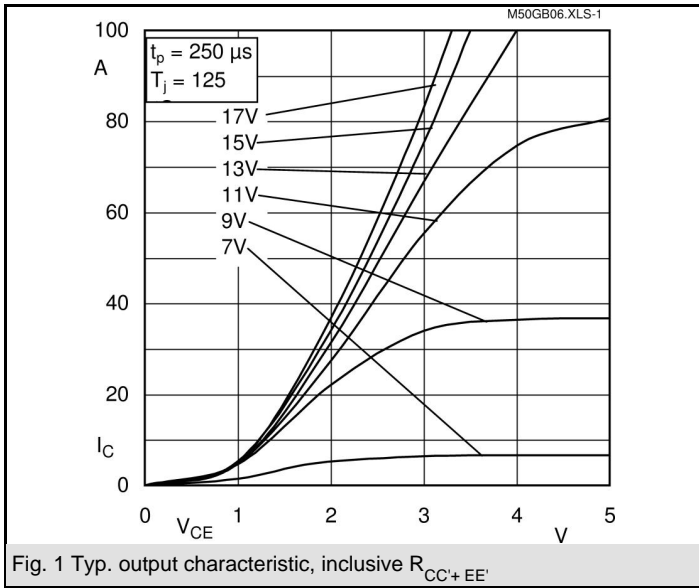

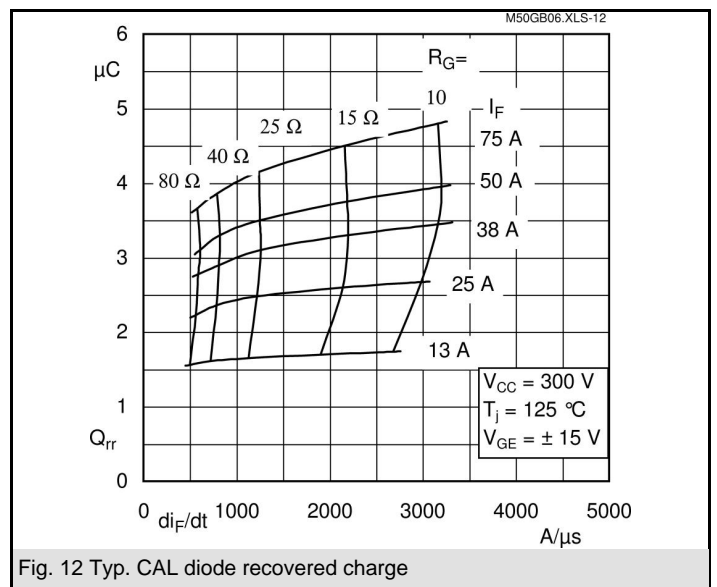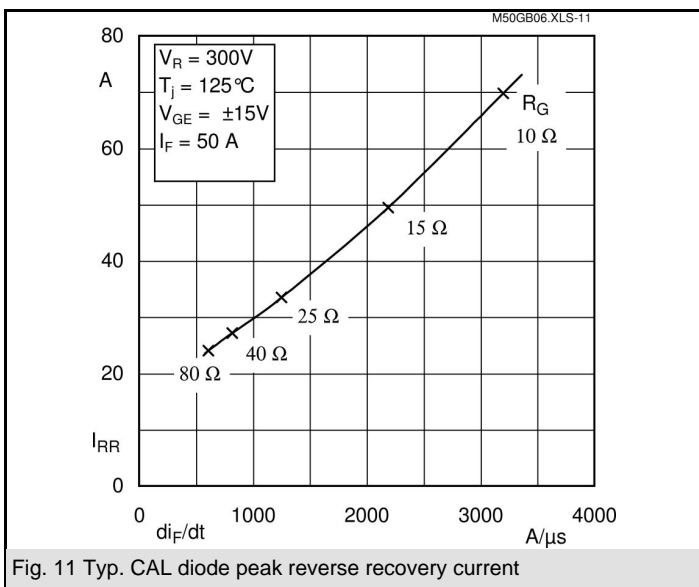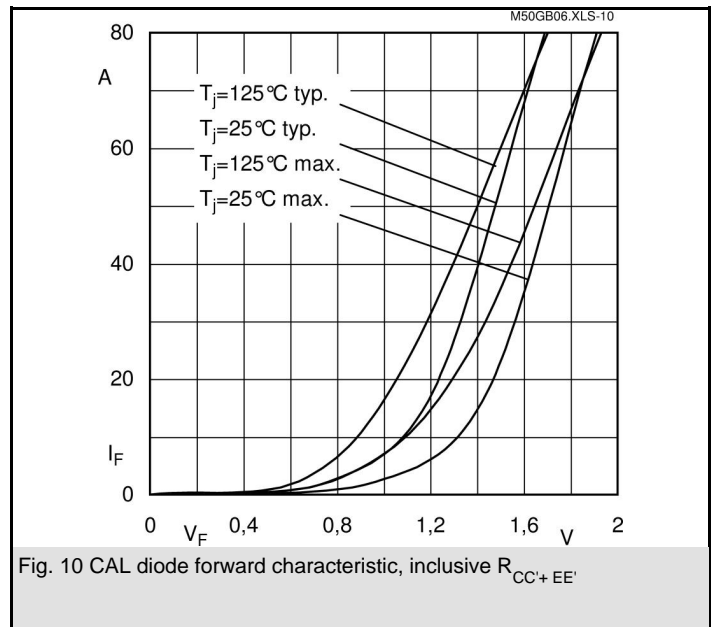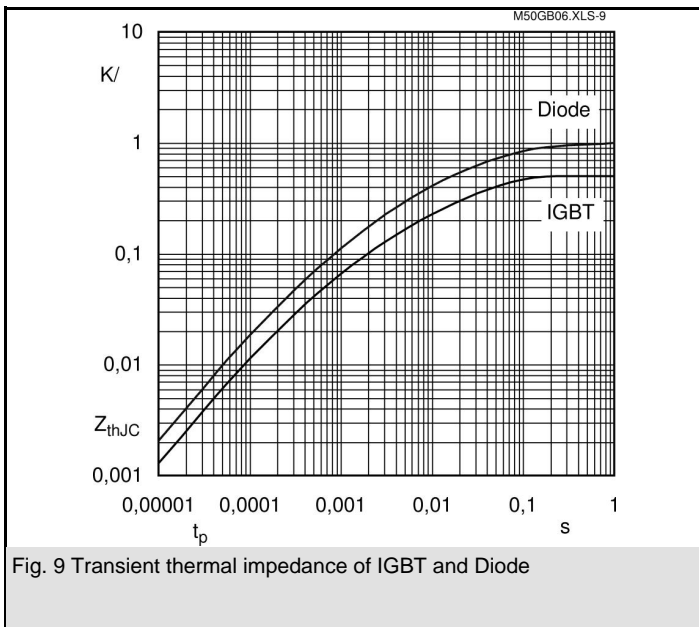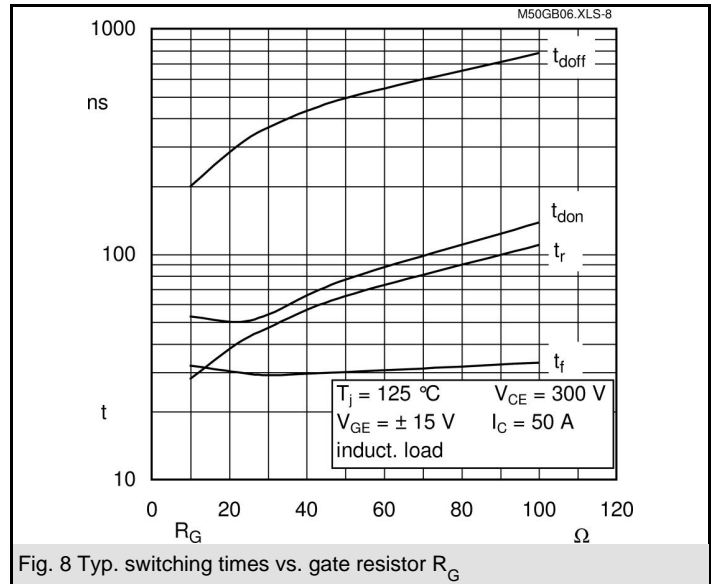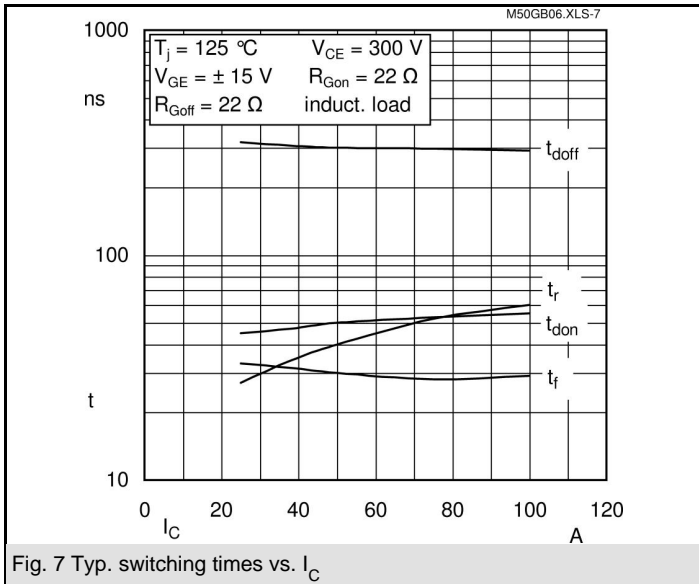


SKM 50GB063D


UL Recognized
File no. E 63 532

Dimensions in mm

CASED61

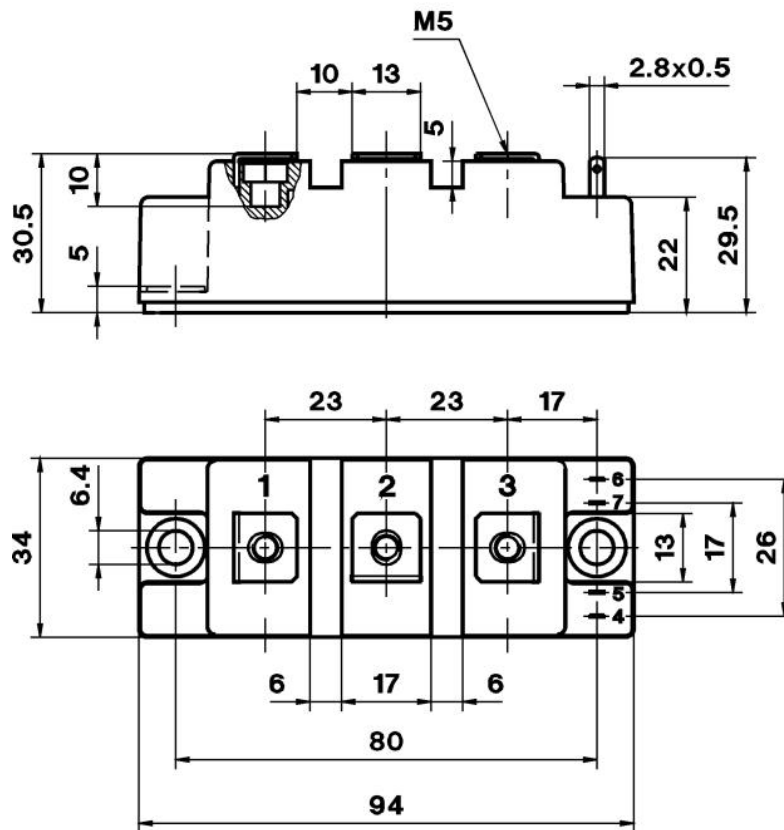

Case D 61

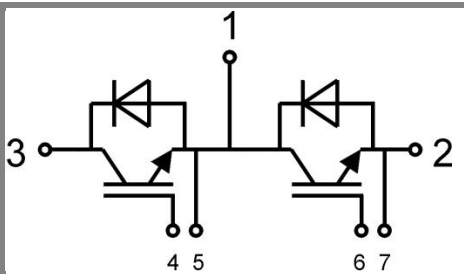

GB

Case D 61